


## Spring Release Hinge Series 700

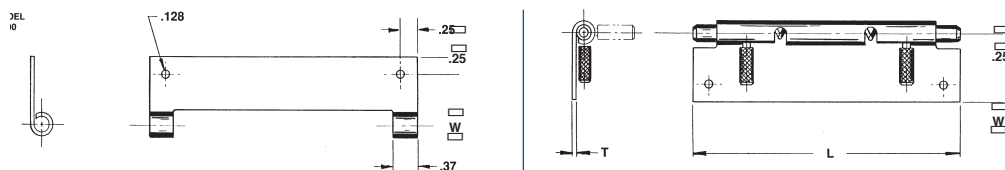

Combining a hinge and a latch in a standard piece of hardware.

The Spring Release Hinge has either a pair of spring-loaded handles or a single handle, which pulls toward the center to release the body or door from the keeper. An alternate style relies on an engagement hole or slot in the adjoining surface. Installation is simple and inexpensive using screws, rivets or by welding.

All styles are manufactured to close tolerances. End play and side play are held to a minimum, insuring a precision fit and smooth operation.

### BODY

|          |    |    |    |         |
|----------|----|----|----|---------|
| L Length | 3" | 4" | 6" | Special |
| W Width  | 1" | 1" | 1" | -       |
| DASH #   | -3 | -4 | -6 | -7      |

### PIN

|                   |      |      |         |
|-------------------|------|------|---------|
| P Pin Diameter    | .250 | .281 | Special |
| W Metal Thickness | .050 | .062 | -       |
| DASH #            | -1   | -2   | -7      |

### HOLES (4)

|        |      |          |         |
|--------|------|----------|---------|
|        | None | Standard | Special |
| DASH # | -0   | -1       | -7      |

### MATERIAL

|        |          |       |           |
|--------|----------|-------|-----------|
|        | Aluminum | Steel | Stainless |
| DASH # | -1       | -2    | -3        |

### MODELS

|  |      |        |                   |
|--|------|--------|-------------------|
|  | Male | Female | Complete Assembly |
|  | -1   | -2     | -A                |

### FINISH

Most commercial finishes are available, including zinc and cadmium on steel, passivate and electropolishing on stainless steel, and anodize on aluminum.

### ORDERING INFORMATION

#### Sample Part #

|                |     |   |   |   |   |   |   |   |   |   |   |                   |
|----------------|-----|---|---|---|---|---|---|---|---|---|---|-------------------|
|                | 700 | - | 4 | - | 1 | - | 0 | - | 3 | - | A |                   |
| Model          |     |   |   |   |   |   |   |   |   |   |   | Complete Assembly |
| 4"L x 1"W      |     |   |   |   |   |   |   |   |   |   |   | Stainless Steel   |
| .250 Pin       |     |   |   |   |   |   |   |   |   |   |   | No Holes          |
| .050 Thickness |     |   |   |   |   |   |   |   |   |   |   |                   |