
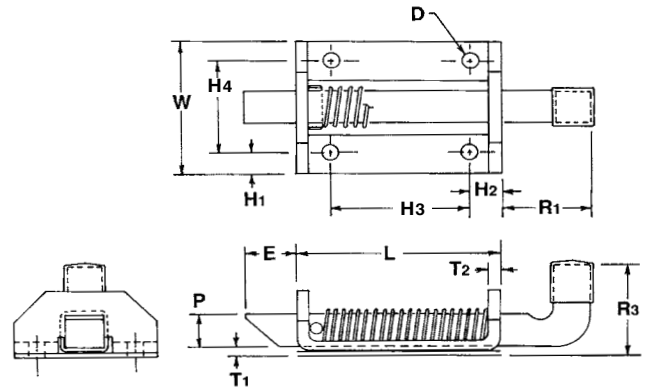


Slam Latch - Wide Body Series 708W



This rugged slam latch is ideal for applications that require a quick and effortless locking mechanism, such as truck and trailer doors, drawers and tailgates, as well as medical and farm equipment.

To engage simply “slam” the door shut. The spring-loaded pin is square with an angled edge that smoothly retracts as it engages with the keeper and then extends back into place in a locked position. To release, grip the handle and pull back.

Special forms, offsets, hole sizes or welding projections are available to your specifications.

*Designates dimensions can be altered to meet your specifications.

PIN

| | | |
|-----|------------------|------|
| P | Pin Size | .437 |
| * E | Extension | .750 |
| R1 | Handle Length | 1.00 |
| R3 | Handle Extension | 1.25 |

BODY

| | | |
|------|---------------|-------|
| L | Length | 2.00 |
| * W | Width | 2.19 |
| T1 | Thickness | .125 |
| T2 | Thickness | .125 |
| * H1 | Hole Location | .250 |
| * H2 | Hole Location | .380 |
| H3 | Hole Location | 1.250 |
| H4 | Hole Location | 1.687 |
| * D | Hole Diameter | .205 |

MATERIAL

C = Stainless S = Stainless

FINISH

Most commercial finishes are available, including zinc on steel, passivate and electropolishing on stainless steel.

ORDERING INFORMATION

