


Slam Latch **Series 708**

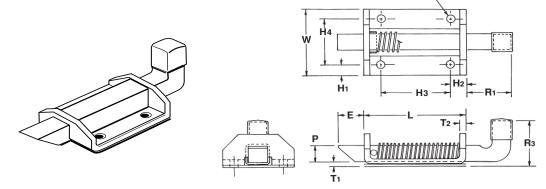

This rugged slam latch is ideal for applications that require a quick and effortless locking mechanism, such as truck and trailer doors, drawers and tailgates, as well as medical and farm equipment.

To engage simply "slam" the door shut. The spring-loaded pin is square with an angled edge that smoothly retracts as it engages with the keeper and then extends back into place in a locked position. To release, grip the handle and pull back.

Special forms, offsets, hole sizes or welding projections are available to your specifications.

*Designates dimensions can be altered to meet your specifications.

PIN					
Р	Pin Size	.437			
* E	Extension	.750			
R1	Handle Length	1.000			
R3	Handle Extension	1.250			
BODY					

	L	Length	2.000
*	W	Width	1.625
	T1	Thickness	.125
	T2	Thickness	.120
*	H1	Hole Location	.250
*	H2	Hole Location	.375
	Н3	Hole Location	1.250
	Н4	Hole Location	1.125
*	D	Hole Diameter	.203

MATERIAL

C = Stainless S= Steel

FINISH

Most commercial finishes are available, including zinc on steel, passivate and electropolishing on stainless steel.

ORDERING INFORMATION

